



HOME

Combi 200
I Saw 215
I Saw 265

Universal 300
Profi 400
Profi 400 HD



Industrie 500
Industrie 500 HD
Industrie 500 HS

Industrie 500 DUO
Mammut 800
Mammut 830

REICH PROFI 400 HD



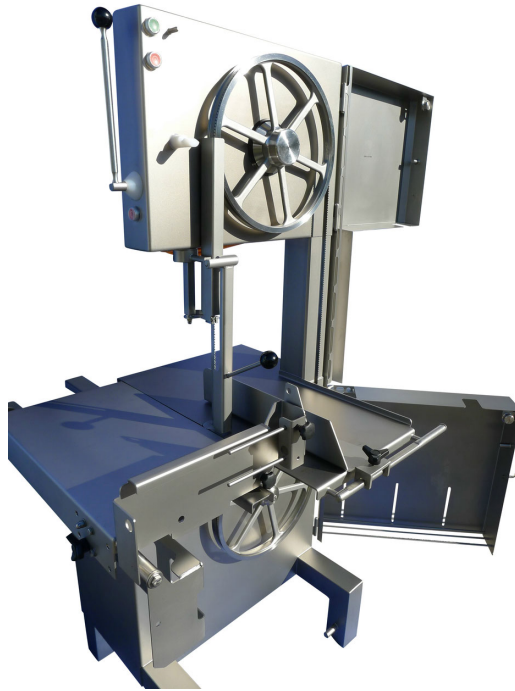
Half side of table as roller bearing supported table designed.
- "CE"-certified and "GS"-approved
(complies with European hygiene and safety regulations.)
- Motor stops automatically when opening the doors or covers.
- with continuous welded strong table plate to the machine housing.
- With maintenance free electronic brake motor.
- Scraper of wheels installed and removable without tools
- Band saw guide in table specially coated and removable without tools.
- Gas damper provides always correct tension of blade.
- All parts rustfree.
- Stainless steel ball bearings allow a easy movement of the carriage.
- the Profi 400 is modified in such a way that the left section of the table is cut off and the machine housing is lowered by approx. 30 mm. This allows to install the rolling table attachment and to achieve the same level of surface between rolling and firm table sections.
- the section of fixed table is continuously welded to housing to get the machine housing 100 % waterproof.
- Rolling table can be turned by 270 degree for easy cleaning.
- the rolling table is equipped with a front plate to enable operator a safe movement of the table and the

goods to be cut.
- the front plate can be turned by 270 degrees once the rolling table is locked.

- OPTION: by adding a second plate behind the rolling table a smooth fixed surface of table can be achieved.
By use of this feature the machine can be used as a standard saw with fixed table.
- Blade guided in the wheels, therefore cannot jump down from wheel.
- By additional grooves the crossing of teeth will be not affected by the wheels.
- Self-carrying frame, strong table, wheels, waste bin, portion-gauge in stainless steel in-oxydable.
- Safety magnet in hygienic design.
- Control device for safety switches.
- Easy to maintain contactor box with standard parts.
- Large grip for ergonomic opening of doors

Technical details:
Voltage : 230/400 V / 50 cycles

Power : 2,2 kW
 Revolutions : 1500/ min.
 Dimensions table overall: 890 x 810/600 mm
 Dimension of sliding table: L=660 x W 374 mm
 Cross distance to Saw blade: 400 mm
 Longitudinal distance to saw blade: 600 mm
 Height of table : 900 mm
 Width of cutting : 380 mm
 Height of cutting : 400 mm
 Saw blade : 3204 x 16 x 0.6 mm
 Housing : Stainless steel
 Dimension : 890 x 810/600 x 1824 mm
 Height of table : 900 mm
 Net weight : 320 kg
 Gross weight : 350 kg on pallet

**Adresse:**

C.-E. Reich GmbH
 Oberer Wasen 13
 D-73630 Remshalden

*

Heute ist Dienstag, der 25 März 2025, 15 Uhr 39

Kontakt:

Phone: +49-7151-79899
 Fax: + 49-7151-74692

*

e-mail: cereich@cereich.de

Homepage: <https://www.cereich.info>

VAT Number: DE146624958

*



Impressum | AGB | Widerrufsbelehrung und -formular | Liefer- und Zahlungsbedingungen | Datenschutz | Cookie-Richtlinie
Copyright: C.-E. Reich GmbH